



PC-Seal®Btape

Universal self-adhesive bitumen based sealant tape.



PC-Seal®Btape self-adhesive sealant tape presents a practical remedy for sealing cracks and joints, as well as insulating junctions and supporting roofing repairs within roof repair systems. Enhanced with a specialized UV protection layer, this tape ensures extended durability when used outdoors. Its array of colors further enhances its adaptability, making it a versatile option for various roof types.



PROTECTED FROM UV RADIATION

The bitumen layer of **PC-Seal®Btape** is protected from UV radiation by aluminum coating. This makes it possible to use the tape outdoor.

DIFFERENT COLORS



The tape is designed for the most popular roofing colors (including metallic). It allows performing repairs or maintenance in the tone of the main surface without disturbing its form.

EASY TO USE AND DURABLE

PC-Seal®Btape is designed to be user-friendly and does not require specialized skills for application. This tape boasts a sealing capability that lasts throughout its full lifespan of 10 years.

FLAWLESS ADHESION TO MANY DIFFERENT SURFACES

The self-adhesive layer ensures optimal adhesion to a variety of surfaces including metal, slate, smooth wood, plastic, concrete, and glass, among others.

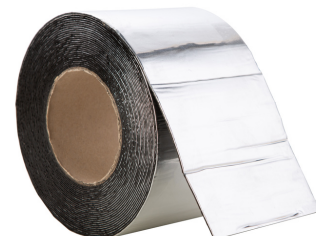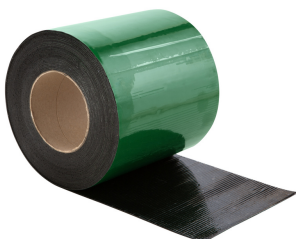



SIZES AVAILABLE

WIDTH, cm	5	7.5	10	15	20	30
LENGTH, 3 m	+	+	+	+	-	-
LENGTH, 10 m	-	+	+	+	+	+


TAPE DIMENSIONS, mm	PACKAGE SIZE, mm	QUANTITY IN PACKAGE	WEIGHT OF PACKAGE, kg
3000 × 50	box 240 × 240 × 320	24	5.9
3000 × 75	box 240 × 240 × 320	16	5.9
3000 × 100	box 240 × 240 × 320	12	5.9
3000 × 150	box 240 × 240 × 320	8	5.9
10000 × 75	box 180 × 180 × 320	4	5
10000 × 100	box 180 × 180 × 320	3	5
10000 × 150	box 180 × 180 × 320	2	5
10000 × 200	box 180 × 180 × 320	1	3.5
10000 × 300	box 180 × 180 × 320	1	5

COLORS AVAILABLE:



COLORS AVAILABLE:

The surface must be flat, dry, and free of any debris. Cut the tape to the required length, remove the protective film, affix the tape to the designated area, and firmly press it down. In cases where the temperature falls below +5°C, it is imperative to acclimate **PC-Seal® Btape** to room temperature for at least 12 hours prior to application. Refrain from using **PC-Seal® Btape** on hot vertical surfaces or surfaces surpassing +80°C.

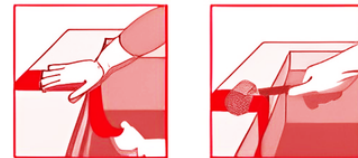

STORAGE:

Store the product in its original packaging, safeguarded from environmental factors and direct sunlight. The shelf life extends for 30 months from the date of manufacture.



PC-WC GLOBAL FZ-LLC

Compass Building, Al Shohada Road Al-Hamra industrial Zone-FZ,
Ras Al-Khaimah, UAE
Email: info@pc-wc.com
Phone +971542455817, www.pc-wc.com

TECHNICAL DATA SHEET UPDATED IN
SEPTEMBER 2020
TDS/PC-SEAL®BTAPE/20

All technical data in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

The information, particularly the recommendations relating to the application and end-use of PC-WC products, are given in good faith based on PC-WC's current knowledge and experience of the products when properly stored, handled and applied under normal conditions by PC-WC recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or any other advice offered. The user must test the product's suitability for the intended application and purpose. PC-WC Global FZ-LLC reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Our technical assistance is at the disposal of the users. Consult the latest update of the technical data sheet on our [website www.pc-wc.com](http://www.pc-wc.com)