



# PC-Deccoral® Scratch

## Mineral based decorative scratch finish coating

PC-Deccoral® Scratch is An elegant decorative scratch finish coating, composed of mineral components and coated with PC-sealcoat® Antidust to achieve the desired aesthetic. PC-Deccoral® Scratch combines crushed and meticulously graded laminar extenders, inert in nature, along with specialized cements, limes, and additives, meticulously formulated to offer durable protection for exterior facades.

### FEATURES & BENEFITS

- Possesses exceptional pollution-resistant characteristics.
- Demonstrates remarkable stability under UV light exposure.
- Improved through polymer modification.
- Displays commendable mechanical strength.
- Facilitates on-site mixing.
- Permits vapor permeability.

### USES & APPLICATION

- Designed for external facades made of concrete, cement rendering, lightweight concrete, and fair-faced brickwork or blockwork, with applicability extending to interior surfaces.
- Primarily employed in External Insulation Finishing Systems (EIFS).
- Application involves the use of a steel trowel for initial application and a plastic trowel for texturing.
- Offered in 1.5mm and 2.0mm grades for varied project requirements.



### TECHNICAL INFORMATION

#### Architectural Specification:

Prepare the substrate by eliminating any loose or friable material, filling any gaps as necessary. Ensure that the surface is clean, dry, and in optimal condition.

#### New Work:

Apply PC-Deccoral® Scratch followed by two coats of PC-sealcoat® Antidust to achieve the desired color and texture, as per the architecturally approved sample.


#### Redecoration:

Safeguard adjacent areas that require protection. Address any cracks, chips, voids, or imperfections using an appropriate filler. Commence by removing loose paint, grease, dirt, and other contaminants. Prime any exposed surfaces as necessary before proceeding with subsequent procedures, as customary in new undertakings.

### PRODUCTS PROPERTIES

Physical Properties	Typical Value
PC-Deccoral® Scratch	1.5mm: 3.0-3.5 kg/m <sup>2</sup> (Mixing ratio: 4.5-5.5 lt / 25 kg bag) 2.0mm: 3.5-4.5 kg/m <sup>2</sup> (Mixing ratio: 4.5-5.5 lt / 25 kg bag)
PC-Sealcoat® Antidust	0.3-0.4 kg/m <sup>2</sup> (depending on texture and surface conditions)

Colour: Available in any colour - use the PC-WC Colours Fan Deck.

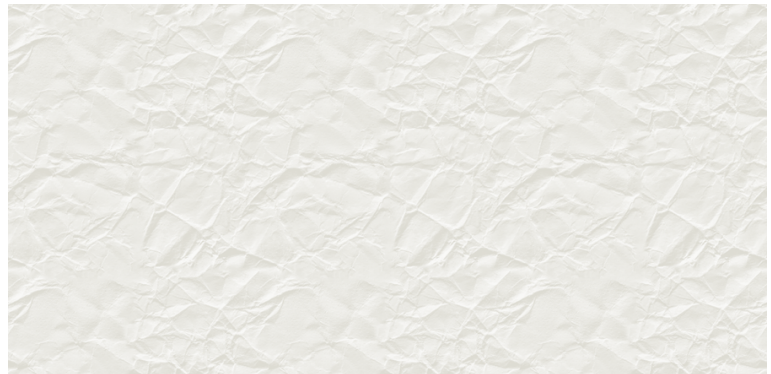

### PC-WC GLOBAL FZ-LLC

Compass Building, Al Shohada Road Al-Hamra Industrial Zone-FZ,  
Ras Al-Khaimah, UAE  
Email: info@pc-wc.com  
Phone +971542455817, www.pc-wc.com

TECHNICAL DATA SHEET UPDATED IN  
SEPTEMBER 2020  
TDS/PC-DECCORAL® SCRATCH20

All technical data in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

The information, particularly the recommendations relating to the application and end-use of PC-WC products, are given in good faith based on PC-WC's current knowledge and experience of the products when properly stored, handled and applied under normal conditions by PC-WC recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or any other advice offered. The user must test the product's suitability for the intended application and purpose. PC-WC Global FZ-LLC reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Our technical assistance is at the disposal of the users. Consult the latest update of the technical data sheet on our website [www.pc-wc.com](http://www.pc-wc.com)