



# PC-Deccotone® Granite

PC-Deccotone® Granite has long been revered as a premier construction material, synonymous with luxury and refined living. In contrast, PC-Deccotone® Granite replicates the aesthetic of granite on exteriors, delivering a robust and aesthetically pleasing surface. Composed of exclusive pure acrylic polymers and mineral aggregates, with enhanced larger particles to emulate authentic granite, this product enjoys broad popularity. It is frequently employed in buildings where genuine granite is utilized at the foundation, with PC-Deccotone® Granite serving as a complementary finish for the upper levels.

## FEATURES & BENEFITS

- Exhibits outstanding resistance to impact and abrasion.
- Showcases remarkable flexibility characteristics.
- Demonstrates high resistance to water and weather conditions.
- Showcases a washable surface that is also highly resistant to abrasion.
- Resistant to the growth of algae and fungi.
- Facilitates the passage of vapor, enabling the substrate to breathe.
- Adheres to ASTM E96 standards.
- Environmentally friendly and water-based.

## USES & APPLICATION

- This product replicates the appearance of natural granite.
- Designed for application in both interior and exterior settings.
- Suitable for various surfaces including concrete, cement rendering, lightweight concrete, cement fiber boards, Sprayplaster, gypsum dry walls, and chipboard.
- Especially ideal for high-rise structures, hospitals, medical facilities, and similar environments.
- Complements PC-WC EIFS seamlessly.

## TECHNICAL INFORMATION

### Architectural Specification:

Prepare the substrate by removing any loose or crumbly material and filling in any gaps as required. Ensure that the surface is clean, dry, and stable before proceeding.

### New Work:

Apply a coat of PC-Prime® PGM using a roller and allow it to cure. Subsequently, apply a coat of PC-Sealcoat® Antidust with a roller and ensure proper curing. Finally, achieve the desired color and texture by spray applying PC-Deccotone® Granite in accordance with the approved architectural sample.


### Redecoration:

Safeguard all surrounding areas that should remain uncovered. Rectify any cracks, chips, voids, or damages with an appropriate filler. Begin by removing any loose or flaking paint, as well as clearing away grease, dirt, and grime. Apply spot primer to any exposed sections as necessary before proceeding with the subsequent steps akin to those for new projects.

## PRODUCTS PROPERTIES

Physical Properties	Typical Value
PC-Prime® PGM	0.15-0.2 kg/m <sup>2</sup>
PC-Sealcoat® Antidust	0.2-0.3 kg/m <sup>2</sup>
PC-Deccotone® Granite	2.5-3.5 kg/m <sup>2</sup>

COLOUR: AVAILABLE IN A BESPOKE RANGE OF COLOURS.

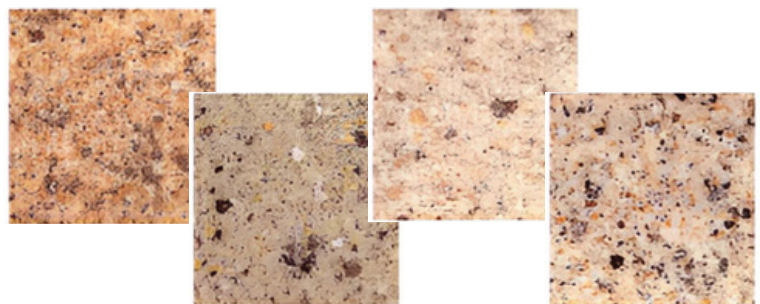

## PC-WC GLOBAL FZ-LLC

Compass Building, Al Shohada Road Al-Hamra Industrial Zone-FZ,  
Ras Al-Khaimah, UAE  
Email : info@pc-wc.com  
Phone +971542455817 , www.pc-wc.com

TECHNICAL DATA SHEET UPDATED IN  
SEPTEMBER 2020  
TDS/PC-DECCOTONE® GRANITE/20

All technical data in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

The information, particularly the recommendations relating to the application and end-use of PC-WC products, are given in good faith based on PC-WC's current knowledge and experience of the products when properly stored, handled and applied under normal conditions by PC-WC recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or any other advice offered. The user must test the product's suitability for the intended application and purpose. PC-WC Global FZ-LLC reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Our technical assistance is at the disposal of the users. Consult the latest update of the technical data sheet on our website [www.pc-wc.com](http://www.pc-wc.com)